



PROMAG ENVIRO
Leader in Water & Waste Water Treatment Supply

CALL US TOLL FREE 1.866.449.2781
www.promagenviro.com info@promagenviro.com

GENERAL NOTES:

- ① FALL THROUGH TABLET FEEDER FROM INLET INVERT TO OUTLET INVERT IS ONE INCH ±3/8".
- ② FINISHED GRADE MUST BE MAINTAINED AT LEAST SIX INCHES BELOW TOP OF LID.
- ③ RISER HEIGHT IS ADJUSTABLE IN SIX INCH INCREMENTS.
- ④ WHERE TABLET FEEDER IS INSTALLED WITHOUT MOUNTING BRACKETS, INSTALL ON FOUR INCH SAND OR FINE GRAVEL LEVELING PAD.
- ⑤ WHERE SAFETY / REINFORCING STRUTS ARE REMOVED WHILE TRIMMING RISER ALONG CUT LINES, STRUTS MUST BE REINSTALLED AT TWELVE INCH INCREMENTS. A STRUT MUST ALWAYS BE INSTALLED IN THE TOP STRUT LOCATION.

PROJECT ENGINEER'S APPROVAL:

I (WE) HEREBY CERTIFY THAT THIS DRAWING HAS BEEN CHECKED AND IS APPROVED FOR USE IN CONFORMITY WITH THE CONTRACT DOCUMENTS.

DATE: _____

NAME: _____

CONTRACTOR'S CERTIFICATION:

I (WE) HEREBY CERTIFY THAT THIS DRAWING HAS BEEN CHECKED AND IS APPROVED FOR USE IN CONFORMITY WITH THE CONTRACT DOCUMENTS.

DATE: _____

NAME: _____


CRITICAL DIMENSIONS

A	0'-10 1/2"	J	0'-0 1/2"
B	2'-6" TO 10'-0"	K	0'-8"
C	2'-1 1/2"	L	0'-3 1/2"
D	0'-5"	M	0'-10"
E	0'-5 1/4"	N	1'-8"
F	0'-1 3/4" (TYP)	O	0'-11"
G	0'-2" (TYP)	P	0'-6" (TYP)
H	0'-4 1/2" (TYP)	Q	
I	0'-1 1/2"	R	


TOLERANCES

NOMINAL DIMENSIONS ARE SHOWN AND MAY VARY ±3/8" FOR ROTOMOLDED COMPONENTS.


U.S. PATENTS PENDING	FOREIGN PATENTS PENDING	© MAM/II
norwaco		11-14-07
BOD-DYNAMIC® MODEL ITR 200S TABLET FEEDER		BDS
JMM		10-2-97
NTS		PC-5-9502

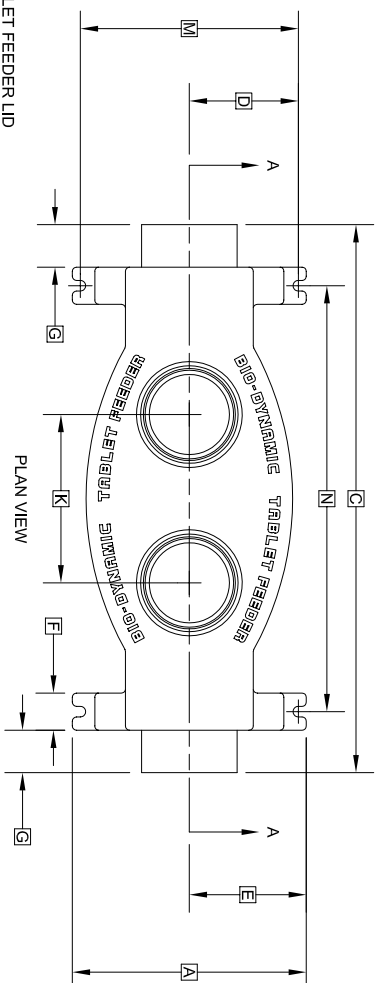

PLAN VIEW

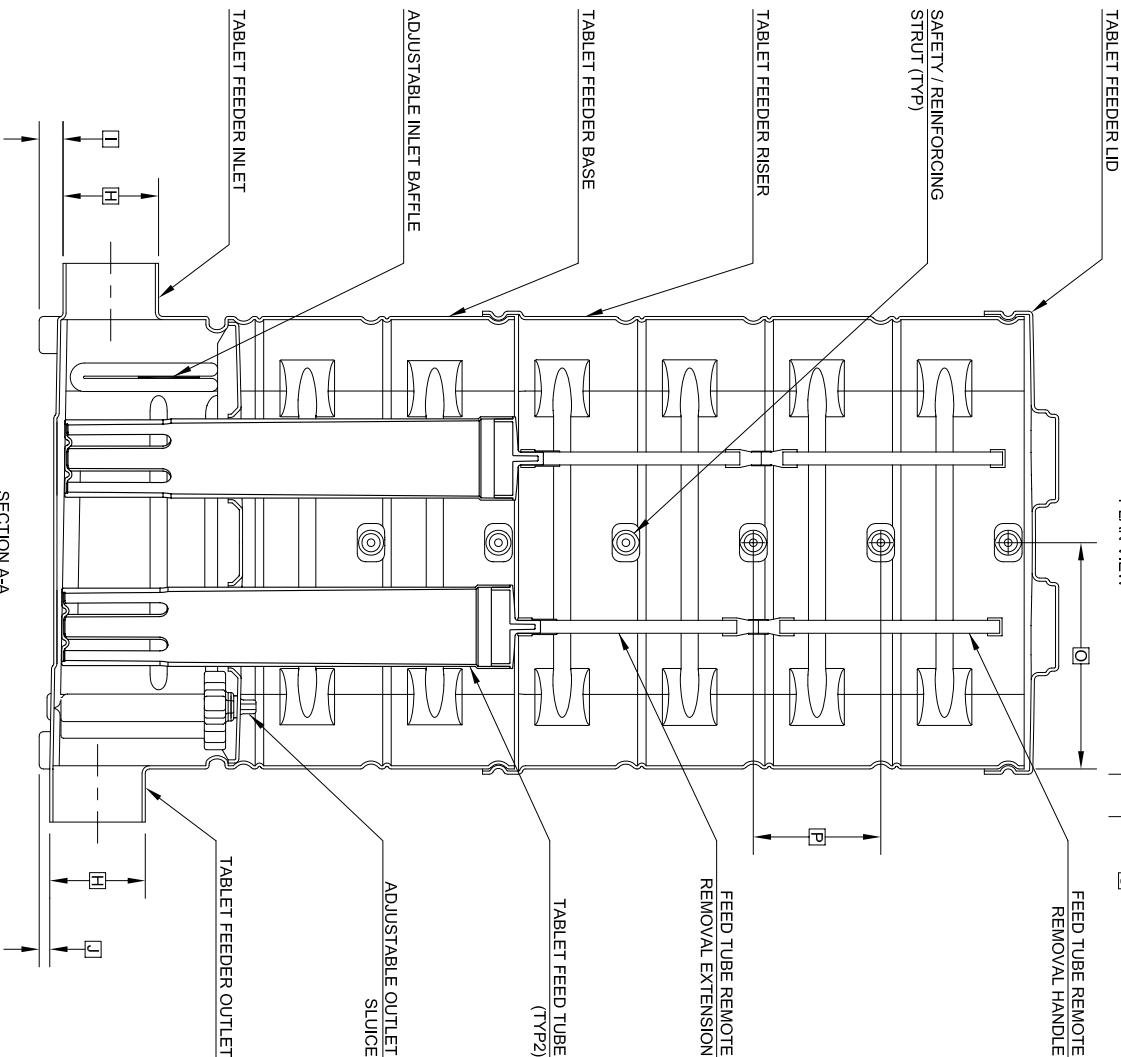

SECTION A-A

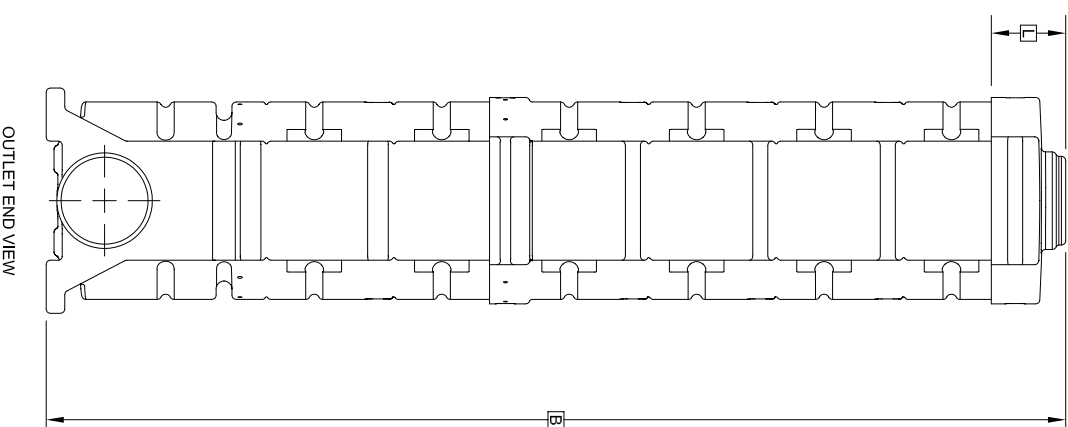

OUTLET END VIEW