

# Switch-Pro™ LC1X

Compact Level Switch Controller



## Application

The general purpose level controller is offered in two configurations for pump and valve control. The LC10 accepts one level sensor input and provides one 16A relay for high level control or low level control. The LC11 accepts two level sensor inputs and provides one latching 16A relay for automatic fill or empty control. The optional flash alarm brings attention to level alarm conditions. Package this level controller with our liquid level switch sensors and fittings.



## Features

- Fail-safe relay control of pumps or valves with 0-60 second delay
- Optional strobe brings immediate attention to level alarm conditions
- PP enclosure rated NEMA 4X with swivel base for conduit alignment
- Easy setup with LED indicators for sensor, power and relay status
- Invert switch changes relay state from NO to NC without rewiring

## Key Benefits

- Controls pumps, valves, horns and alarm indicators
- Mounts directly on Flowline level switches or fittings
- Corrosion resistant enclosure for indoor or outdoor use
- Complete solution for level switch control requirements



LC1\_-10\_1  
Shown

LC1\_-10\_2  
Shown



Faceplate  
Shown

## Compatible Products



LU10

### SWITCH-TEK™

#### Ultrasonic Level Switch

Broadly applied in chemicals and light weight oils



LZ12

### SWITCH-TEK™

#### Vibration Level Switch

Applied in wastewater with light coating or scaling



LV10

### SWITCH-TEK™

#### Vertical Buoyancy Level Switch

Applied in clean water and non-coating chemicals

# Switch-Pro™ LC1X

Compact Level Switch Controller




## Specifications


<b>Supply voltage:</b>	120 / 240 VAC @ 50-60 Hz.
<b>Consumption:</b>	5 watts maximum
<b>Sensor inputs:</b>	LC10: (1) Two wire level switch LC11: (2) Two wire level switches
<b>Sensor supply:</b>	13.5 VDC @ 27 mA
<b>LED indication:</b>	Sensor, power & relay
<b>Strobe type:</b>	-10X1: N/A -10X2: Xenon tube
<b>Strobe flash:</b>	-10X1: N/A -10X2: 1 per second
<b>Contact type:</b>	LC10: (1) SPDT relay LC11: (1) SPDT latching relay
<b>Contact rating:</b>	250 VAC @ 16A
<b>Contact output:</b>	Selectable NO / NC
<b>Contact delay:</b>	0.15 - 60 seconds
<b>Contact latch:</b>	LC10: N/A LC11: Selectable ON/OFF
<b>Ambient temp.:</b>	F: -40° to 140° C: -40° to 60°
<b>Pressure:</b>	Atmospheric
<b>Enclosure rating:</b>	NEMA 4X (IP65)
<b>Encl. material:</b>	-10X1: PP, UL94VO -10X2: PP, UL94VO & PC
<b>Conduit entrance:</b>	1/2" NPT
<b>Enclosure mount:</b>	3/4" NPT (3/4" R)
<b>Classification:</b>	General purpose
<b>Compliance:</b>	CE
<b>Approvals:</b>	CSA, LR 79326

## Dimensions

### Without Strobe Alert

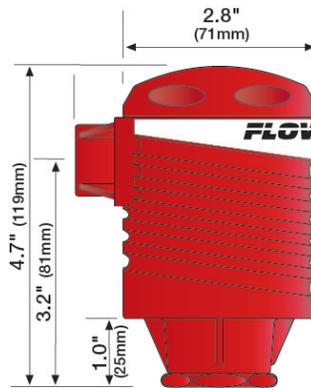

### With Strobe Alert

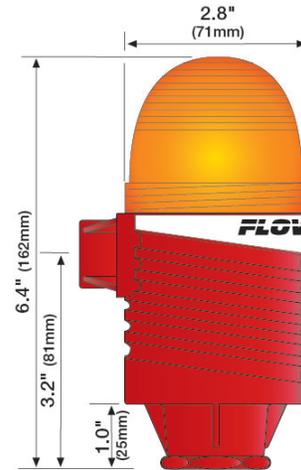


## Strobe Alert

The Controller with Strobe Alert configuration flashes when the relay is energized during a high or low level alarm condition, bringing immediate visual attention.



## Ordering

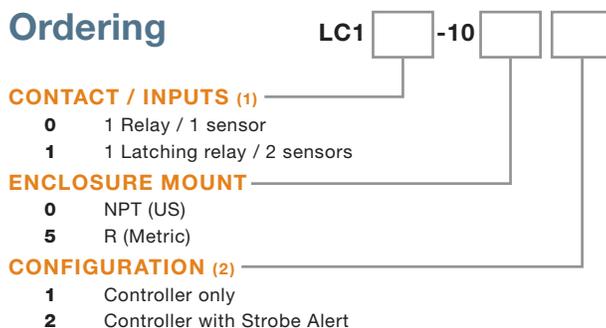

## NOTES

- 1) The level controller is compatible with Flowline level switch sensors and installation fittings.
- 2) CE compliance is only available in the controller only configuration.