


Test Pumps • Clog-Buster®

- 


A) Air-Max® Pro HV Test Pump (Part #273968)

 - Larger barrel diameter - fewer strokes per inflation
 - Contoured solid wood handle
 - Forged steel construction for extra toughness
 - Gauge with molded rubber cover
 - Traditional metal thumb lock
 - 3' hose with strain-relief
 - Product Weight: 6.25 lbs (2.83 kg)

- 

B) Air Max® Test Pump (Part # 273958)


 - Gauge raised from base for protection
 - Durable Steel Barrel
 - Textured steel base prevents pump from slipping
 - Durable, no-kink hose
 - Product Weight: 3.6 lbs (1.36 kg)

- 

C) Econ-O-Pump™ Test Pump (Part #273888)


 - Traditional thumb lock
 - 140 PSI high-pressure gauge with protective cover
 - All steel construction with cast iron base
 - Product Weight: 1 lb (.45 kg)

- Clog-Buster® Drain Flusher**
- Unclogs drain pipes in seconds
 - Simply remove aerator from spigot of faucet and attach faucet adapter
 - Attaches to standard garden hose fitting
 - Insert clog buster as far as possible into drain and slowly turn on the cold water - clog should dislodge almost immediately
 - Eliminates need for using chemicals

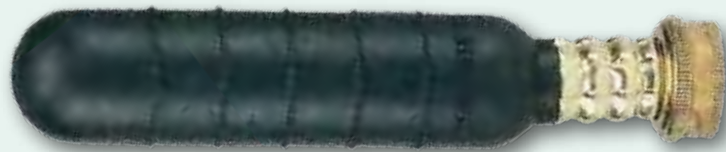


Part Number	Product Description
Clog-Buster® Drain Flusher	
303127	1" - 2" Clog-Buster® drain flusher
303135	1.5" - 3" Clog-Buster® drain flusher
303143	4" - 6" Clog-Buster® drain flusher
006193	Faucet adapter

- Manometer (Part #010205)**
- Used for testing gas lines and DWV pipe
 - Measures water columns from 0" to 16"
 - Reads in increments of 1/10"
 - Product Weight: .5 lb (.23 kg)

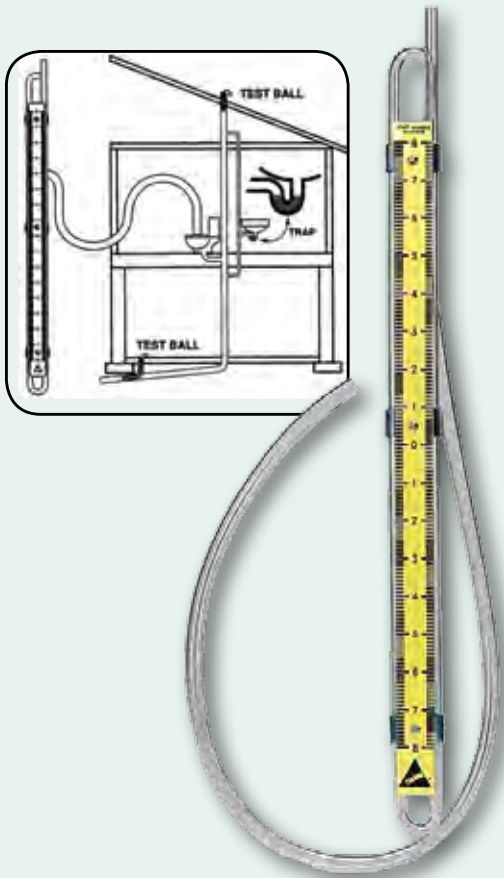

Point Repair Carrier

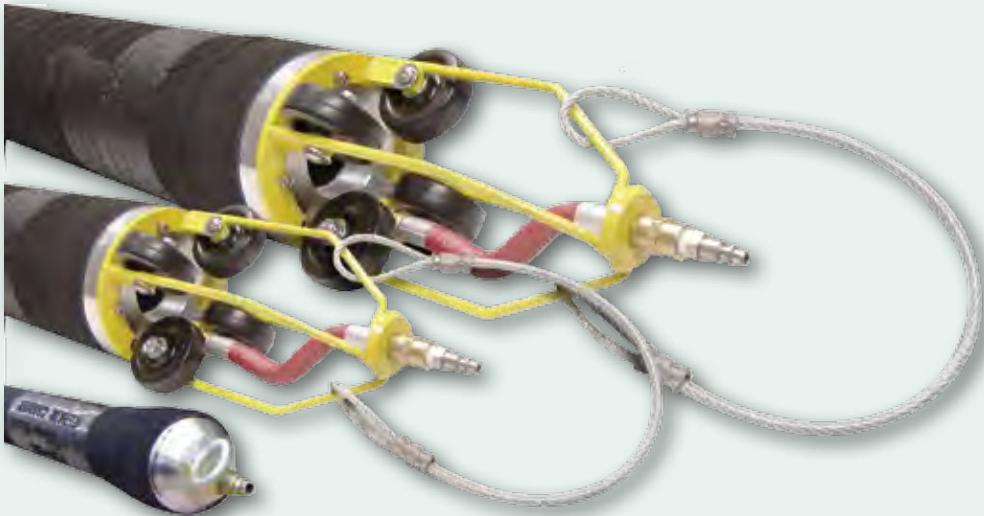

Cherne's point repair carriers are well-suited for most point repair systems. Available for pipe sizes 4" to 12", Cherne's carriers are known for both their durability and reliability. Custom lengths are available upon request.

- Features for all sizes:**
- Made of aramid corded natural rubber: extremely durable and flexible
 - Flexible: All units can fold in half for transport
 - ¼" NPT Inflation Port with male quick disconnect for ease of connection

- Features on 6"-10" and 8"-12":**
- Integrated cage/wheel assembly for ease of movement down the pipe
 - Bypass design allows sewage bypass during repair
 - Unique centered inflation port for use with push rod inflation poles
 - Wire harness keeps unit centered in pipe
 - 2" bypass allows for continuous sewer flow

Point Repair Carrier



Part Number	Length	Approx. Contact Length 6" - 10"	Max Pipe Diameter	Deflated Diameter	Inflation Pressure
Multi-Size Point Repair Carriers 6" - 10" Diameter					
278588	5'	48"	10.25"	4.63"	25 PSI (1,7 bar)
278598	8'	84"	10.25"	4.63"	25 PSI (1,7 bar)
278518	10'	108"	10.25"	4.63"	25 PSI (1,7 bar)
278608	12'	132"	10.25"	4.63"	25 PSI (1,7 bar)
278618	15'	168"	10.25"	4.63"	25 PSI (1,7 bar)

Part Number	Length	Approx. Contact Length 8" - 12"	Max Pipe Diameter	Deflated Diameter	Inflation Pressure
Multi-Size Point Repair Carriers 8" - 12" Diameter					
278628	5'	48"	12.25"	5.80"	25 PSI (1,7 bar)
278638	8'	84"	12.25"	5.80"	25 PSI (1,7 bar)
278528	10'	108"	12.25"	5.80"	25 PSI (1,7 bar)
278648	12'	132"	12.25"	5.80"	25 PSI (1,7 bar)
278658	15'	168"	12.25"	5.80"	25 PSI (1,7 bar)

Part Number	Length	Approx. Contact Length 4" - 6"	Max Pipe Diameter	Deflated Diameter	Inflation Pressure
Multi-Size Point Repair Carriers 4" - 6" Diameter					
278548	5'	52"	6.25"	2.60"	50 PSI (3,4 bar)
278558	8'	88"	6.25"	2.60"	50 PSI (3,4 bar)
278508	10'	112"	6.25"	2.60"	50 PSI (3,4 bar)
278568	12'	136"	6.25"	2.60"	50 PSI (3,4 bar)
278578	15'	172"	6.25"	2.60"	50 PSI (3,4 bar)



Chain Assemblies • Test Gauges • Tub Plugs

Poly-Lift Lines • Extension Hoses



Tub Waste & Overflow Plugs: (Part #012678)

- Isolate bath waste for air/water testing
- Yellow ABS plastic
- Natural rubber gasket
- Threads into drain spuds with center hole and center hole overflow elbows
- Can only be used in overflow drains with 1/2" and 3/8" center hole diameters



A) Extension/Inflation Hoses with Gauge:

- Well suited for plugs up to 15"
- 0-100 PSIG gauge
- 3/16" ID hose:

Extension/Inflation Hoses

- Well suited for plugs up to 15"
- 3/16" ID hose

Part Number	Description
Extension/Inflation Hoses with Gauge	
274218	5' Extension hose with gauge
274228	10' Extension hose with gauge
274238	20' Extension hose with gauge
Extension/Inflation Hoses	
274011	2' Extension hose
274038	3' Extension hose
274054	5' Extension hose
274100	10' Extension hose
274208	20' Extension hose
055816	Deflator with clamp (female replacement end)
055808	Inflator with clamp (male replacement end)



Test Gauges:

- 2" plastic face
- High-quality brass 1/4" connection

Part Number	Description	
Test Gauges without Test Body		
000698	0-15 PSI pressure range	.1 PSI increments
000628	0-30 PSI pressure range	.5 PSI increments
000638	0-60 PSI pressure range	1 PSI increments
000648	0-100 PSI pressure range	2 PSI increments



Test Gauges:

- 2" plastic face
- Chrome plated body
- 1/8" Schrader valve
- 3/4" NPT(F) pipe connection

Part Number	Description	
Test Gauges with Hexagonal Test Body		
024568	0-15 PSI pressure range	.1 PSI increments
019698	0-30 PSI pressure range	.5 PSI increments
019708	0-60 PSI pressure range	1 PSI increments
019718	0-100 PSI pressure range	2 PSI increments



Replacement Ring & Chain Assembly:


- Prevents Test-Ball® plugs from falling down a line
- Includes safety tag

Part Number	Product Description
Replacement Ring & Chain Assemblies	
059708	2" Ring with 12" chain
059718	3" Ring with 12" chain
059728	4" Ring with 12" chain
059738	5" Ring with 12" chain
059748	6" Ring with 12" chain
059758	2" Ring with 24" chain
059768	3" Ring with 24" chain
059778	4" Ring with 24" chain
059788	5" Ring with 24" chain
059798	6" Ring with 24" chain

Poly-Lift Line with Gauge:

- Retard gauge: helps prevent "peg-out" damage
- Heavy-duty rubber gauge cover protects gauge face
- 3/8" ID hose for quick inflate/deflate
- Quick-dump valve for easy deflation
- Quick disconnect design for easy installation
- Designed for use with plugs with removable inflator valve and eye bolt

Part Number	Length
Poly-Lift Line with Gauge	
261398	20'
261408	30'
261418	40'
048468	0-60 psi retard gauge with protective rubber cover
053458	0-60 psi retard gauge only

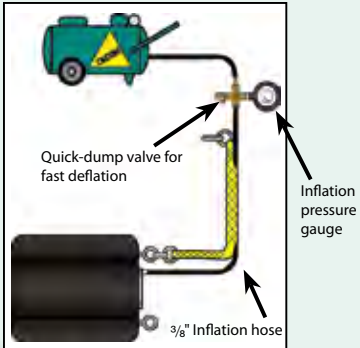

Dual Inflation Hose:

- Designed for large diameter multi-size plugs (15"-30" to 54"-96")
- 0-60 psi gauge with high impact resistant cover
- 3/4" inflation line with 3/16" read-back hose
- Dual hose assembly helps prevent gauge "peg-out"/flutter
- Quick disconnect fittings
- Quick dump valve on 3/4" hose to speed up deflation

Part Number	Description
Dual Inflation Hose w/ Gauge	
058058	30' Length

Poly-Lift Line:

- Great for plugs up to 15"
- 3/16" ID hose
- Threaded connection fittings

Part Number	Product Length
Poly-Lift Line	
261084	20'
261106	30'
261114	40'

