



Model 207 Automatic Dosing Siphon


CALL US TOLL FREE 1.866.449.2781
www.promagenviro.com info@promagenviro.com

Specifications

Diameter of Outlet: 2" NPT male thread
Draw down: 7" Single operation
6.5" Dual operation
Diameter of Bell: 8"
Discharge invert to low water level: 5.4"
Average Discharge Rate: 30 GPM
Minimum Discharge Rate: 25 GPM

Materials

Trap and Bell: 3/16" thick High Density
Polyethylene (linear)
Vent Pipes: 3/4" Sch 40 PVC
Bolts: Stainless Steel

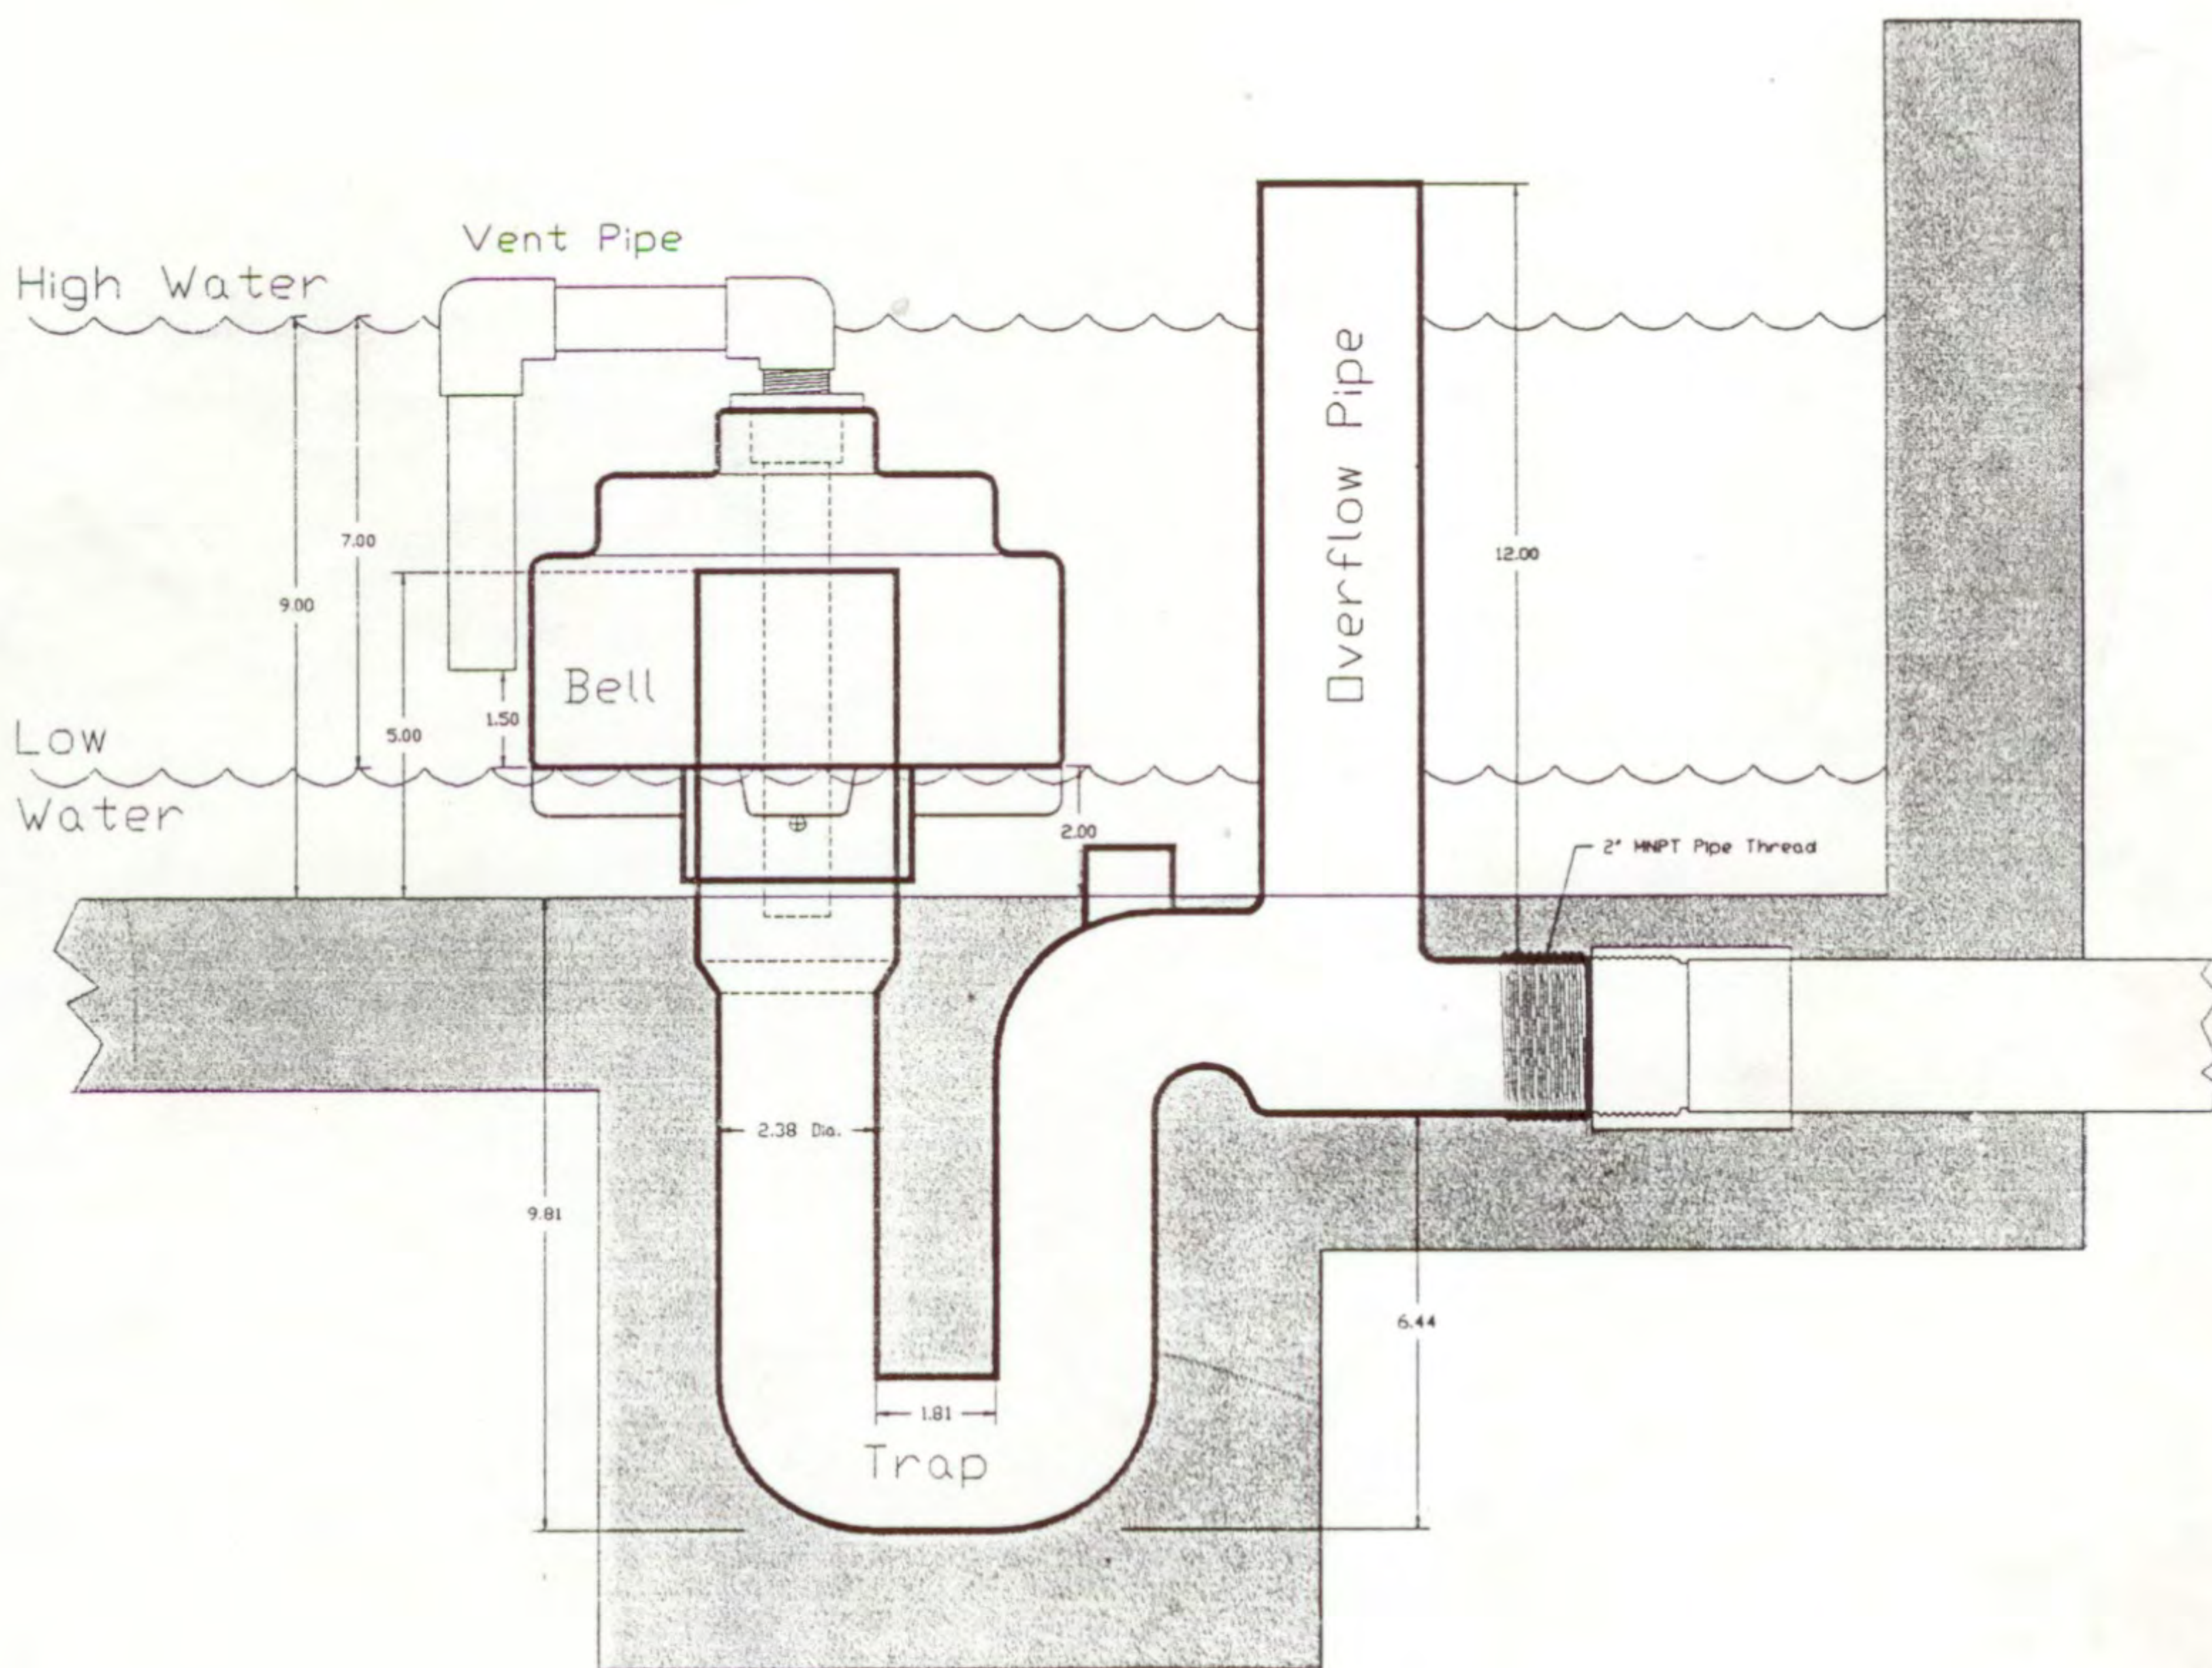

Fluid Dynamic Siphons, Inc.


Model 212 Automatic Dosing Siphon

Specifications

Outlet: 2" NPT male thread
Draw Down: 12" single operation
11.5" dual operation
Diameter of Bell 8"
Discharge invert to low water: 5.4"
Average discharge rate :32 GPM
Minimum Discharge rate: 25 GPM

Materials

Trap and Bell: 3/16" thick high
density Polyethylene (linear)
Vent Pipes: 3/4" Sch 40 PVC
Bolts: Stainless Steel

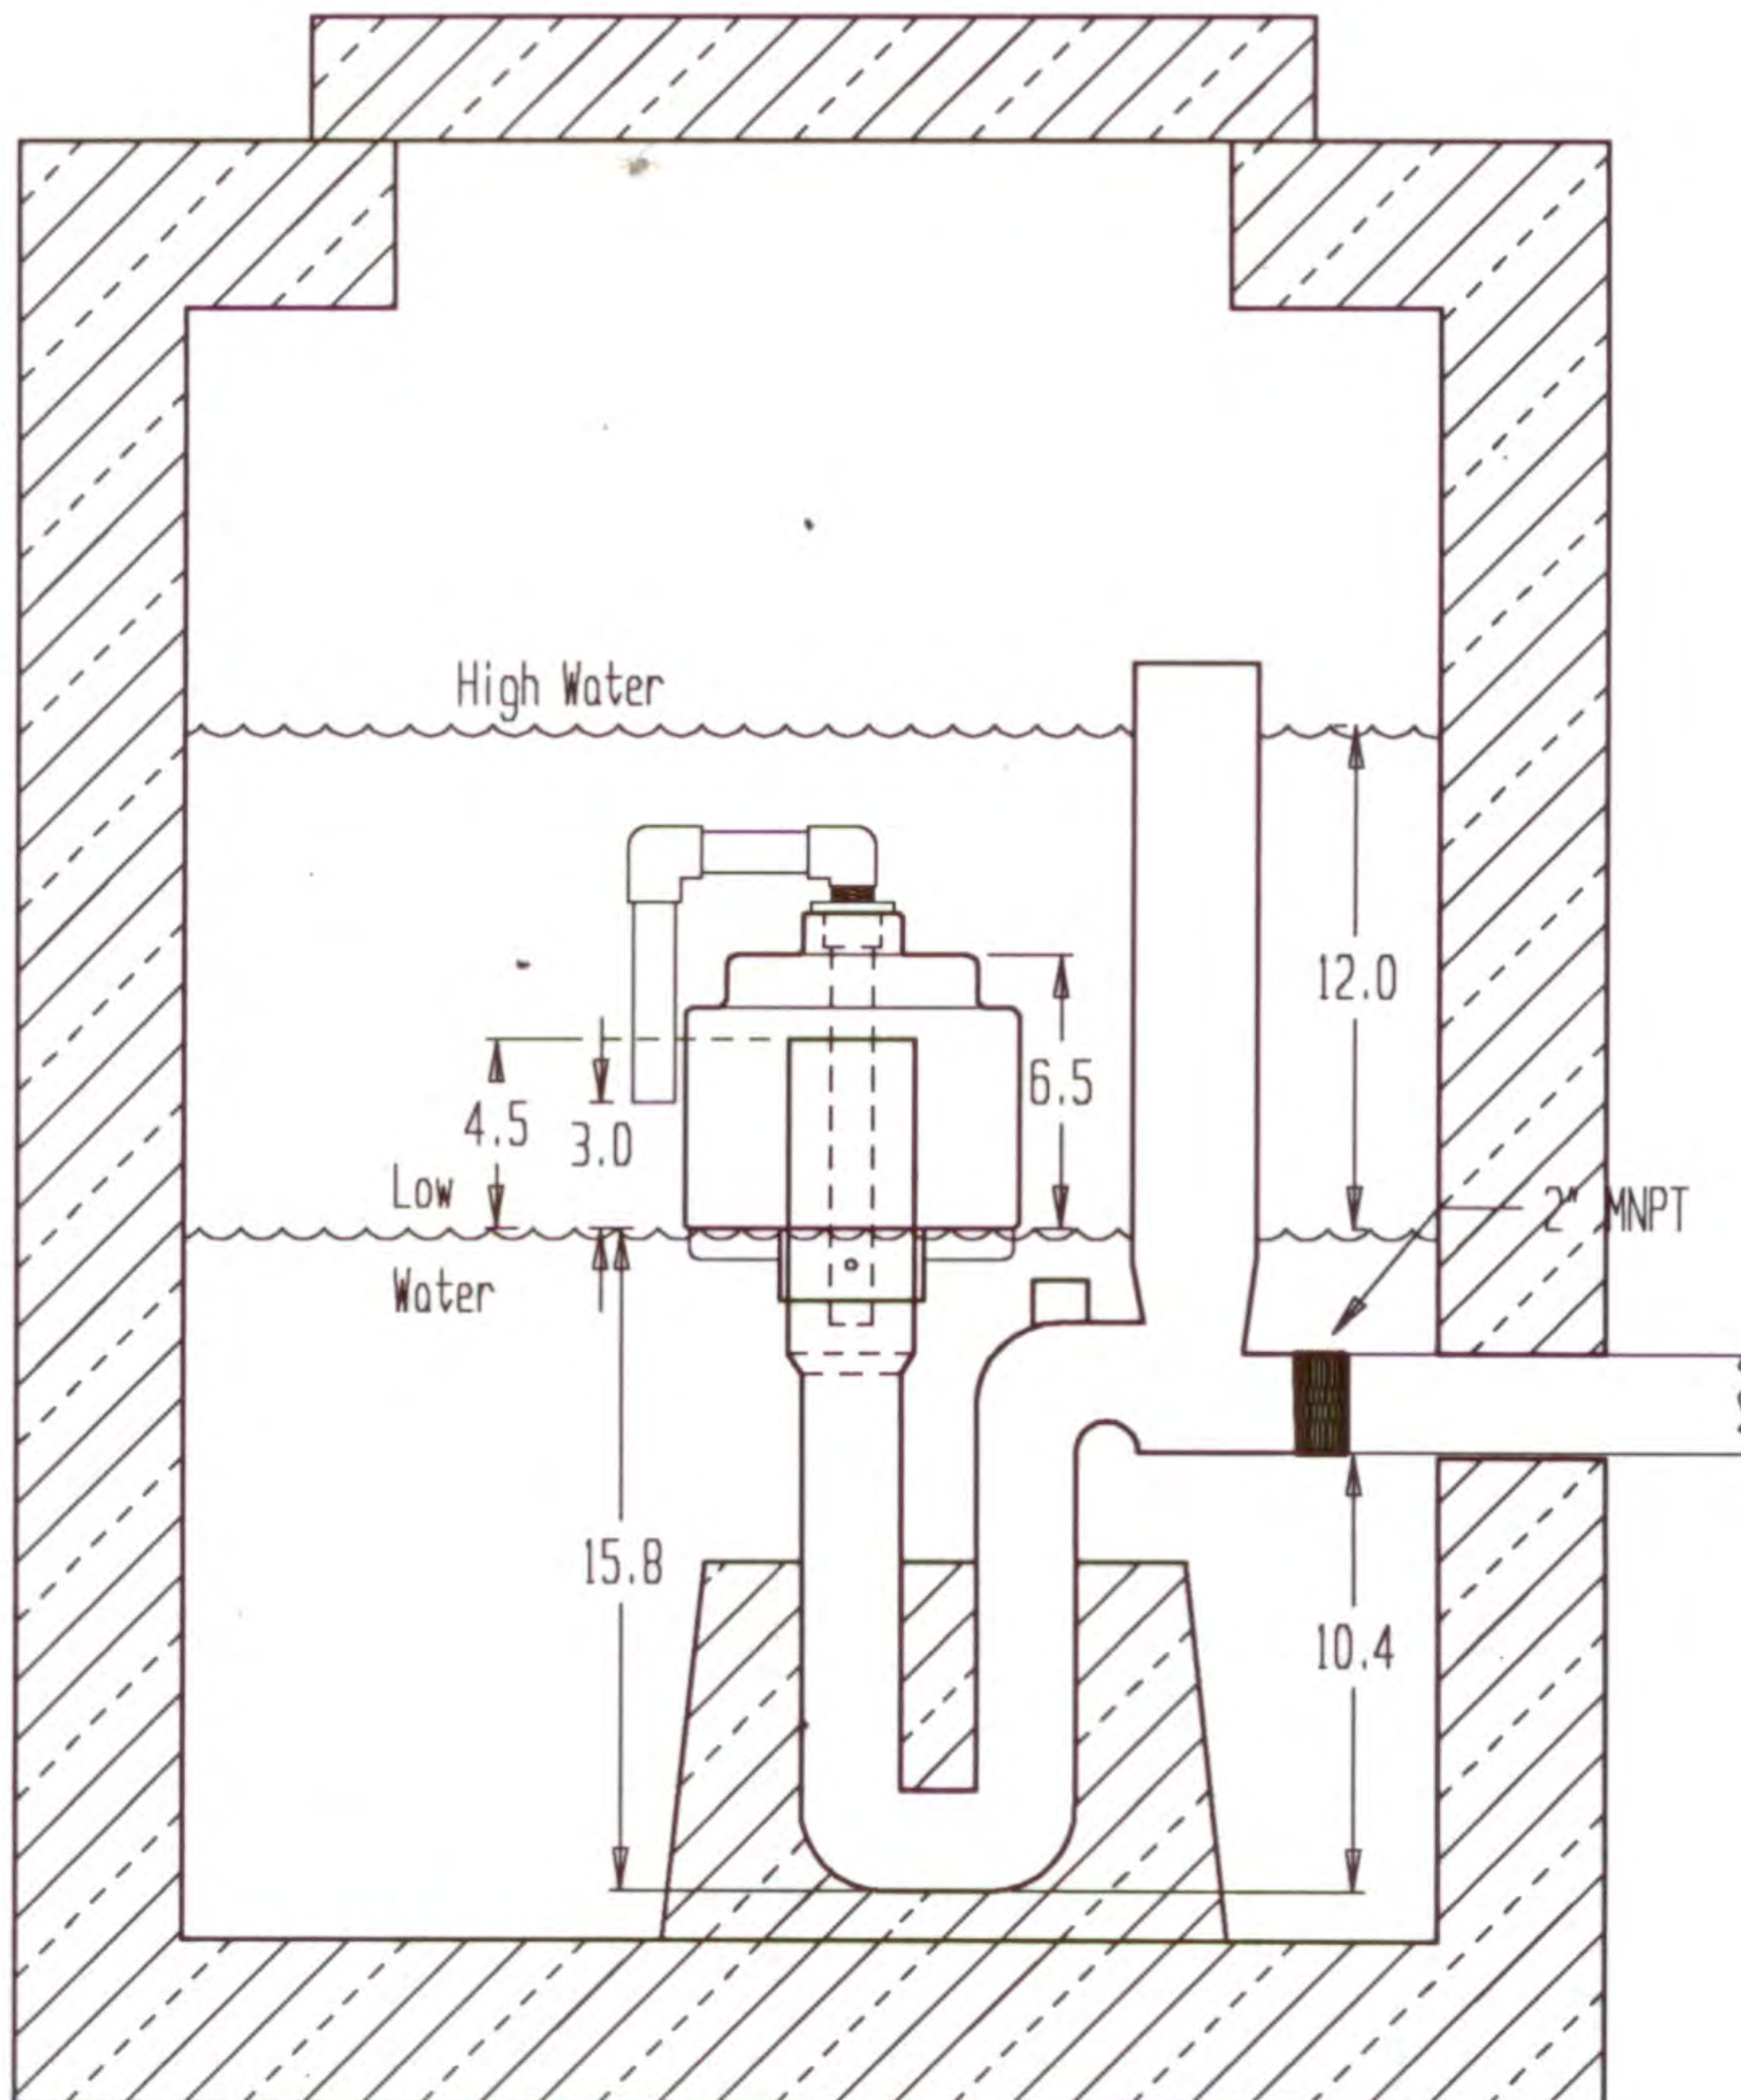

Fluid Dynamic Siphons, Inc.

Model 216 Automatic Dosing Siphon

Specifications

Outlet: 2" NPT male thread

Draw Down: 16" single operation

15.5" dual operation

Diameter of Bell 8"

Discharge invert to low water: 5.4"

Average discharge rate :33 GPM

Minimum Discharge rate: 25 GPM

Materials

Trap and Bell: 3/16" thick high density Polyethylene (linear)

Vent Pipes: 3/4" Sch 40 PVC

Bolts: Stainless Steel

