

# HIGH-PRESSURE PLUGS



## High-Pressure Plug Features:


- Multi-size design for use in various pipe diameters
- The rubber and metal is bonded, elimination fears of separation or rolling off resulting from high back pressures
- Optimized design using steel, aramid and natural rubber to ensure longevity and robust construction
- Water must be used to pressurize these plugs due to high working pressure
- Removable and field repairable hardware
- Safety/over-inflation device
- Air is purged from the plug during inflation
- Air is purged from the test area (8"-12" and larger)

## HIGH-PRESSURE PLUGS



PART NUMBER	PLUG DESCRIPTION	BYPASS DIAMETER	USAGE RANGE	MAXIMUM BACK PRESSURE	INFLATION PRESSURE	PRODUCT WEIGHT (LBS.)	DEFLATED LENGTH	DEFLATED DIAMETER	EYE BOLTS
511088	4"-8" (100-200 mm)	3/8" M	3.8"-8.2" (96.5-208.3 mm)	150 psi	200 psi	8 lbs	16"	3.8"	None
511128	8"-12" 200-300 mm)	1-1/2" M	7.7"-12.2" (195.6-309.9 mm)	150 psi	200 psi	24 lbs	24"	7.7"	1
512168	12"-16" (300-400 mm)	2" M	11.9"-16.2" (302.3-411.5 mm)	150 psi	200 psi	52 lbs	24"	11.9"	1
512208	16"-20" (400-500 mm)	2" M	15.2"-20.2" (386.1-513.1 mm)	150 psi	200 psi	92 lbs	24"	15.2"	2
512268	20"-26" (508-660.4 mm)	2" M	19.2"-26.2" (487.7-665.5 mm)	150 psi	200 psi	146 lbs	24"	19.2"	2
512328	26"-32" (660.4-812.8 mm)	2" M	25.8"-32.2" (655.3-817.9 mm)	150 psi	200 psi	371 lbs	24"	25.8"	4

## ACCESSORIES

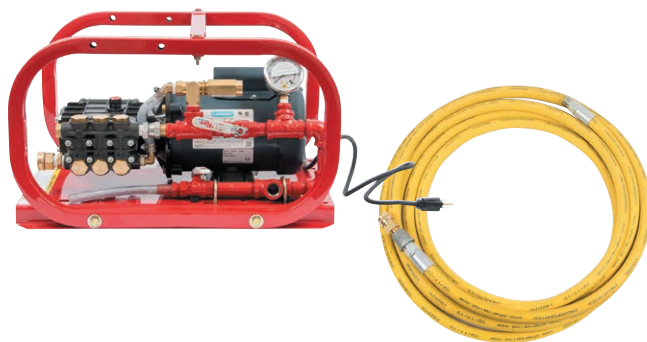

PART NUMBER	DESCRIPTION
276008	Inflation Hose, High Pressure Plug, 30', 1/4" QD, For Use With 4"-8" to 12"-16" HP Plugs
276018	Inflation Hose, High Pressure Plug, 30', 1/2" QD, For Use With 16"-20" to 26"-32" HP Plugs
276028	Read Back Hose, High Pressure Plug, 30', 1/4" QD
278198	Hydrostatic Test Pump, Electric
278188	Hydrostatic Test Pump, Manual
064348	0-300 psi, 2.5" dial, Liquid Filled Pressure Gauge With Retard Increments to 600 psi
7004574	1/4" Male QD x 1/4" FNPT Fitting