

FLUOROMETERS




Little Dipper™ 2 In-line Fluorometer

Turner Designs' Little Dipper 2 is an accurate, single channel, light industrial fluorometer which installs directly into process streams

Add a fluorescent tracer to your cooling tower or boiler inhibitor chemistry and the Little Dipper 2 will accurately measure the concentration. Walchem's powerful Intuition controllers accept the analog signal and will maintain the optimum treatment levels.

KEY BENEFITS

- Simple calibration with Walchem controllers
- Simple installation – now with built-in isolator
- Provides better control of treatment chemicals
- Solid-state LED/Photodiode technology, no moving parts
- Typical sensitivity to less than 1 ppb
- Quick-disconnect watertight connector
- Improved turbidity and dissolved iron rejection

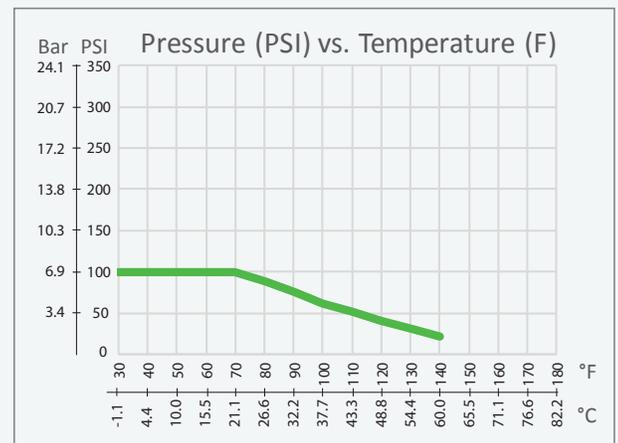

SPECIFICATIONS

MOUNTING TEE

Parameter	Specification	
	1"	3/4"
Materials	PVC - Type I, molded plastic, FKM O-ring	Glass-filled Polypropylene, FKM O-ring
Threading	1" NPTF	3/4" NPTF
Length	3.3 inches (8.4 cm)	
Dynamic pressure rating	100 PSI (6.9 bar) (see graph)	
Temperature rating	122°F (50°C) (see graph)	

ORDER INFORMATION

103963	Little Dipper 2, PTSA, 1" Tee
103964	Little Dipper 2, Fluorescein, 1" Tee
191723	Little Dipper 2, PTSA, 3/4" Tee
191724	Little Dipper 2, Fluorescein, 3/4" Tee
103967	Little Dipper 2, PTSA, No Tee
103968	Little Dipper 2, Fluorescein, No Tee
191721	Calibration Tee, Little Dipper 2
103773	Calibration Standard, PTSA, 300 ppb
103998	Calibration Cable

FLUOROMETER

Parameter	Specification
Dynamic Range	1-300 ppb PTSA 1-100 ppb Fluorescein
Factory Calibration	1-200 ppb PTSA (prior to s/n LD20012200) 1-300 ppb PTSA (after s/n LD20012200) 1-100 ppb Fluorescein
Power draw	0.8 W @ 12 VDC (1.0 W max)
Input voltage	8 to 30 VDC
Signal output	4-20 mA
Light source	Light emitting diode
Detector	Photodiode
Warm-up time	5 seconds
Length	8.63 inches (21.9 cm)
Diameter (housing)	1.3 inches (3.3 cm)
Diameter (max)	1.72 inches (4.4 cm)
Weight	4.4 oz (125 g)

Handheld Little Dipper Fluorometer



Small, lightweight, highly durable handheld fluorometer ideal for quick measurements in the field

Two versions are available for both cooling tower and boiler system applications. Simple to operate, the Handheld Little Dipper is a perfect tool for system verification.

KEY BENEFITS

- Dustproof, watertight, highly durable case
- Small size easily fits in shirt or jacket pocket
- Operates using AA batteries for >10,000 measurements per set
- Single-point (100 ppb) calibration
- 5 second warm up
- Low maintenance field fluorometer

SPECIFICATIONS

Parameter	Specification
Linear Range	0-200 ppb typical for fluorescein 0-200 ppb typical for PTSA
Sensitivity	1 ppb typical for fluorescein and PTSA
Temperature	41 - 104°F (5 - 40°C)
Warm-up time	5 seconds
Case	IP67 standard: dustproof/waterproof
Power	2 AA batteries
Light source	LED
Detector	Photodiode
Weight	4.3 oz (120 kg)
Size	8.9" x 2.0" x 1.75" (22.6 cm x 5.1 cm x 4.5 cm)

ORDER INFORMATION

- 103965 Handheld, PTSA
- 103966 Handheld, Fluorescein
- 104045 Calibration Standard, PTSA, 100 ppb
- 104046 Calibration Standard, Fluorescein, 100 ppb

ABOUT US

Walchem integrates its advanced sensing, instrumentation, fluid pumping and communications technologies to deliver reliable and innovative solutions to the global water treatment market. Our in-house engineering is driven by quality, technology and innovation. For more information on the entire Walchem product line, visit: www.walchem.com



Scan QR code with your
smartphone camera
for more details!

W A L C H E M

IWAKI America Inc.

Walchem, Iwaki America Inc.

Five Boynton Road Hopping Brook Park | Holliston, MA 01746 USA | Phone 508-429-1110 | walchem.com

ISO 9001 registered company
180456.L May 2022